



SN-XVR3816E2-JA

5MP 16CH 2HDD Hybrid DVR



Key Features

- Supports AHD, TVI, CVI, CVBS, IP video inputs
- Max. 24 channels IP camera inputs, each channel up to 1080P
- Encoding ability up to 4K-N @ 8 fps, 5MP @ 7 fps, 4MP @ 8 fps, 1080P @ 15 fps
- Up to 16-ch (analog channel) perimeter protection
- Support 1-ch CVBS output, 1-ch VGA output, 1-ch HDMI output at up to 4K(3840 x 2160)
- Support HDMI and VGA simultaneous output
- Audio via coaxial cable
- Smart search & playback
- Support multiple languages




Specification

Video and Audio	
Analog Video Input	16-ch BNC interface, Supports coaxial control
AHD Input	8MP, 5MP, 4MP, 1080P, 720P
TVI Input	8MP, 5MP, 4MP, 1080P, 720P
CVI Input	8MP, 5MP, 4MP, 1080P, 720P
CVBS Input	PAL/NTSC
IP Video Input	8-ch (only IP up to 24-ch), each channel up to 1080P
HDMI Output	3840 × 2160, 1920 × 1080, 1280 × 1024, 1024 × 768
VGA Output	1920 × 1080, 1280 × 1024, 1024 × 768
CVBS Output	Support
Audio Input	8-ch RCA, 16-ch via coaxial cable
Audio Output	1-ch, RCA
Two-way Audio	Supported via RCA and Network (Half-Duplex Intercom)
Perimeter Protection	
Intrusion Detection	16-ch, Support accurate detection of human and vehicle
Recording	
Encoding Resolution	4K-N, 5MP, 4MP, 1080P, 720P, D1, CIF, etc.
Frame Rate	4K-N @ 8fps, 5MP @ 7fps, 4MP @ 8fps, 1080P @ 15fps
Video Bit Rate	Main stream: 16 Kbps to 4096 Kbps, Sub stream: 16 Kbps to 1024 Kbps
Dual Stream	Support
Audio Compression	G.711
Playback and Backup	
Recording Mode	Manual, Alarm, Motion detection, Timing
Recording Playback	16/9/4/1
Search Mode	Time /Date, Alarm, Picture grid, Event
Backup Mode	USB Device, Network
Network	
Protocols	HTTP, HTTPS, TCP/IP, IPv4, IPv6, UPnP, UDP, RTSP, SMTP, NTP, DNS, DHCP, P2P, IP Filter, DDNS, 802.1X, SNMP

Remote Users	4
Smart Phone	iPhone, iPad, Android
Interoperability	ONVIF, SDK, CGI
Storage	
HDD	2 SATA interface
Capacity	Up to 8TB for each disk
Disk Group	Support
Interface	
Network Interface	2 RJ45 10M/100M/1000M self-adaptive Ethernet Interface
Alarm In/Out	8/1
RS-485	1 port
USB Interface	3 ports (1 front USB 2.0 port, 1 rear USB 2.0 port, 1 rear USB 3.0 port)
General	
Power Supply	12 VDC/3A
Power Consumption	Max 10W (without HDD)
Working Temperature	-10 °C to 50 °C (14 °F to 122 °F)
Working Humidity	Less than 90% RH
Certifications	CE-EMC - EN 55032, EN IEC 61000-3-2, EN 61000-3-3, EN 55035 CE-LVD - EN IEC 62368-1 FCC 47 CFR Part 15 Subpart B
Dimensions (W×D×H)	372 × 311.2 × 46.5 mm (14.65 × 12.25 × 1.83 inch)
Net Weight	Approx. 2.2 kg (4.85 lb without HDD)

Dimensions (mm)

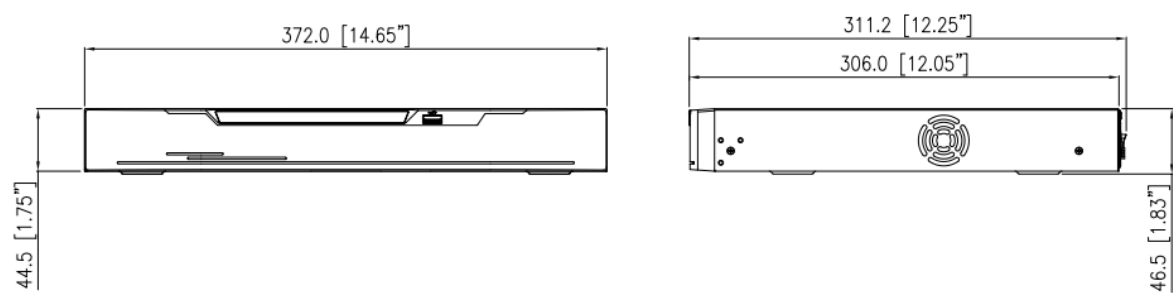

Rear Panel

